Voltage Selector Insert to KE, CE, KG, CG

Voltage selector inserts for power entry modules, types KE, CE, KG, CG



To be used with drawer for KE, CE, KG, CG

	See below: Approvals and Compliances			
Description - Component :	Other versions on request - Fuse drawer with other voltage values			
Drop-in type, Switching Unit	References			
- 1 Function :	Fits to type: CE; CG; CG-Bowdencable; KE; KG; KG-Bowdencable			
Voltage selector insert (step switch)	Weblinks			
- Up to four different switch positions	pdf data sheet, html datasheet, General Product Information, Approvals,			
- Approved together with power entry module	Distributor-Stock-Check, Accessories, Detailed request for product			

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.


Product standards


Product standards that are referenced

Organization	Design	Standard	Description
IEC	Designed according to	IEC 60127-6	Miniature fuses. Part 6. Fuse-holders for miniature fuse-links
Application stan	ndards		
Application standar	rds where the product can be used		
Organization	Design	Standard	Description
IEC	Suitable for applications acc.	IEC/UL 62368-1	Audio/video, information and communication technology equipment - Par 1: Safety requirements
IEC	Suitable for applications acc.	IEC 60601-1	Medical electrical equipment - Part 1: General requirements for basic safety and essential performance
Compliances			
The product compl	lies with following Guide Lines		
Identification	Details	Initiator	Description
RoHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/863
REACH		SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Voltage Selectors Insert 1

Dimension [mm]

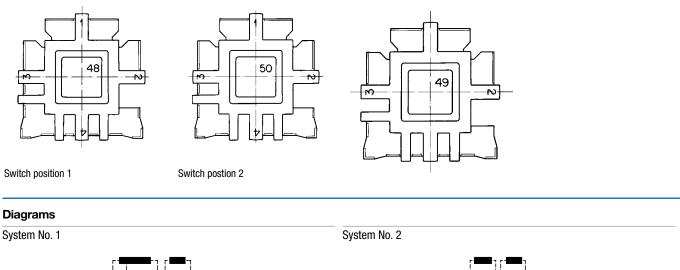





2 separate windings, one with a tap 3 or 4 switch positions

2 separate windings one with a tap 3 or 4 switch positions


System No. 3





2 separate windings 2 switch positions 2 separate windings 2 switch positions

System No. 4



2-pole change over switch

3 separate windings 3 or 4 switch positions

3 or 4 switch positions 3 separate windings

3 or 4 switch positions

Voltage Selector Inserts

Switch position	System No.	Voltage marking, switch position				Order Number
		1	2	3	4	
1	-	-	-	-	-	4305.0048.00
1	1	100	120	220	240	4305.0048.01
1	3	130	110	240	220	4305.0048.02
1	2	110	-	-	220	4305.0048.03
1	3	-	110	240	220	4305.0048.04
1	2	115	-	-	230	4305.0048.05
1	1	130	110	240	220	4305.0048.08
1	2	120	-	-	240	4305.0048.09
1	1	100	115	-	230	4305.0048.10
1	2	230	-	-	110	4305.0048.11
1	1	240	230	220	200	4305.0048.15
1	4	-	115	230	-	4305.0048.17

Voltage Selectors Insert 1

Switch position	System No.		Order Number			
		1	2	3	4	
1	1	-	110	220	-	4305.0048.18
1	1	100	120	230	240	4305.0048.20
1	1	110	130	230	50	4305.0048.21
1	2	115 *	-	-	230 *	4305.0048.22
1	-	110	115	215	230	4305.0048.23
1	-	100 V	115 V	215 V	230 V	4305.0048.24
1	2	100	-	-	200	4305.0048.25
1	-	-	115 *	-	230 *	4305.0048.28
1	-	100	120	220	230	4305.0048.30
2	-	-	-	-	-	4305.0050.00
2	3	130	110	240	220	4305.0050.02
2	3	-	110	240	220	4305.0050.04
2	3	150	110	-	220	4305.0050.06
2	3	-	-	-	-	4305.0050.26
2	-	100	120	220	-	4305.0050.30
3	-	-	-	-	-	4305.0049.00
3	4	-	220 *	110 *	-	4305.0049.07
3	4	-	115	230	-	4305.0049.17
3	1	-	-	-	-	4305.0049.18
3	4	-	230 *	110 *	-	4305.0049.19

* Lettering rotated 180°

Packaging unit

50 Pcs